


# PRODUCT SPECIFICATION SHEET

## LPV2 LED Downlight

Rev. C1

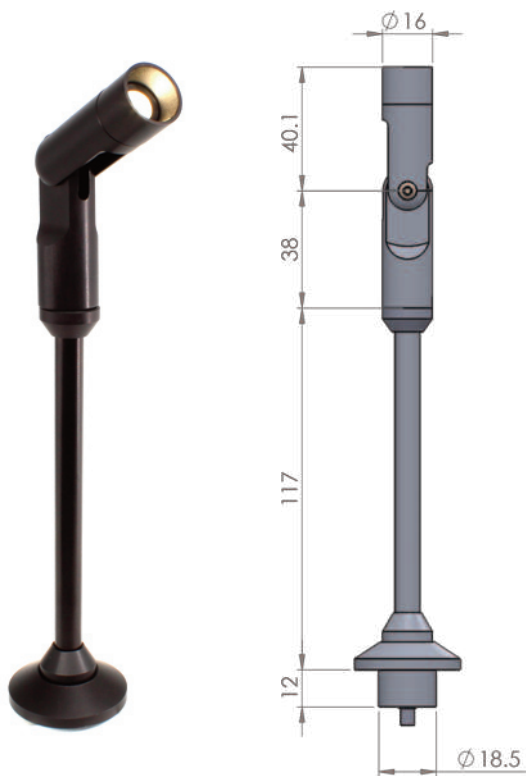

Surface mount LED downlight fitting with stalk. Features free rotation and tilt. Stalk can be configured as 20mm length as standard and we can also supply custom lengths if required.

The LPV2 fitting features a sleek design and 360° rotation with 90° + 45° articulation in the pivot. Available in a choice of colour temperatures with high colour rendition and a selection of optics, the fitting can be used to provide contemporary, functional lighting in any environment. The fitting has an inbuilt plug/socket and can be easily removed from its stalk.

### TECHNICAL INFORMATION

Colour Temperatures	3000K, 4000K
Typical CRI Values	96CRI (3000K) 95CRI (4000K)
Power Consumption	1.6W per fitting
Voltage	3.2V nominal @ 500mA
Lumens per Watt	3000K - 51lm/W 4000K - 54lm/W
Lens Options	16° / 23° / 36° / 61°
Material	Aluminium
Finishes	Black, silver, white or custom RAL colour
Articulation	Tilt: 90° + 45° / Rotation: 360°

### DRIVER CONTROL OPTIONS (Depending on specified driver)

No Dimming	Local Potentiometer Dimming
0-10V Dimming	Remote Potentiometer Dimming

### PRODUCT ORDERING CODES

MODEL	OPTICS		COLOUR TEMP		FLANGE COLOUR		LENGTH	
LPV2	16°	16	3000K	30	Black	BL	20cm	20
	23°	23	4000K	40	Silver	SV	Custom	CU
	36°	36			White	WH		
	61°	61			Custom	CU		

LPV2				
------	--	--	--	--

e.g, LPV2-16-30-BL-20



Address  
37 Henley Fields  
Maidstone  
Kent ME14 5UY



Mobile +44 (0)779 358 1314  
Telephone +44 (0)162 292 0021  
Email [ian@heritagelightingmatters.com](mailto:ian@heritagelightingmatters.com)  
Web [www.heritagelightingmatters.com](http://www.heritagelightingmatters.com)